



Hand held Mixers
Bermixer PRO 350W with Stainless Steel
Tube 18" with constant pressure switch

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



Bermixer PRO 350W with Stainless Steel Tube 18" with constant pressure switch
Hand held Mixers



600352
(BP3545U)

Bermixer PRO, portable, hand held, variable speed (up to 9000 RPM), equipped with constant pressure switch, handle grip, with 18" cutter tube, 1/2 HP, 350 watt, NEMA 5-15P

Short Form Specification

Item No. _____

Bermixer PRO, portable, hand held immersion blender, variable speed, handle grip, with 18" stainless steel cutter tube, 1/2 HP, 350 watt, 115v/60/1, 3.2 amps. Stainless steel tubes (various lengths) and whisk available upon request as an accessory, to mix, liquidize, whip or emulsify.
 IP55 water protected control panel.
 With NEMA 5-15P Plug
 With Constant Pressure Switch

Main Features

- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
- Designed to be used directly into pots (using accessories) up to 13 gallons (50 lt).
- Delivered with:-flat base motor-stainless steel tube-space saving storing wall support
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Safety feature requires both hands to start the mixer (no volt release system).
- Very easy to use, assemble and dismantle.
- Bayonet system to easily remove accessories without the use of tools.
- Red luminous indicator flashes when the device is overloaded.
- Its light weight ensures an optimum comfort for the user.
- Designed to be used directly in stew pots up to 8 - 13 gallons (30 - 50 lt), depending on the tube size.
- Thanks to its electronic speed variator, a quick press with the thumb on the selector is all you need to change speeds.
- Productivity suitable for 50 to 300 meals per service.

Construction

- Power: 350 watts (1/2 HP).
- Maximum speed 9000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories

- 1 of Stainless Steel cutter tube 18in (453mm) PNC 650133


Optional Accessories

- Stainless Steel cutter tube 14in (353mm) PNC 650132 □
- Stainless Steel cutter tube 18in (453mm) PNC 650133 □
- Adjustable rail, for containers 15in - 26in PNC 653292 □
- Bowl cradle for containers PNC 653294 □
- Reinforced whisk 10in PNC 653578 □




APPROVAL: _____

Front

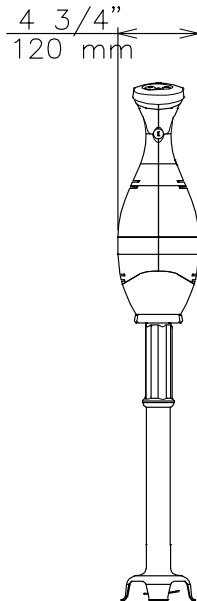


Side

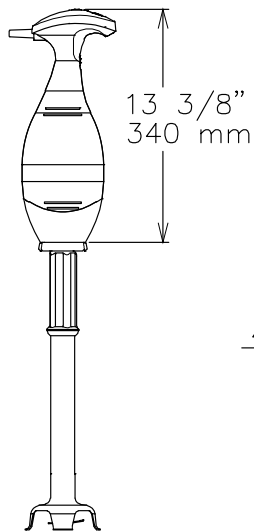

EI = Electrical connection

Top



Electric

Supply voltage:

600352 (BP3545U)

110-120 V/1 ph/50/60 Hz

Total Watts:

0.4 kW

Plug type:

USA NEMA 5-15P

Key Information:

External dimensions, Width: 5 7/16" (138 mm)

External dimensions, Depth: 4 3/4" (120 mm)

External dimensions, Height: 30 1/8" (765 mm)

Shipping width: 11 7/16" (290 mm)

Shipping depth: 27 3/16" (690 mm)

Shipping height: 7 1/16" (180 mm)

Shipping weight: 10 lbs (4.7 kg)