



Hand held Mixers
Bermixer PRO 650W with Stainless Steel
Tube 26" with constant pressure switch

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



Hand held Mixers
 Bermixer PRO 650W with Stainless Steel Tube 26" with constant
 pressure switch



600387
(BP6565U)

Bermixer PRO, portable, hand held immersion blender, variable speed, equipped with constant pressure switch, handle grip, with 26" cutter tube, 1 HP, 650 watt, NEMA 1-15P

Short Form Specification

Item No. _____

Bermixer PRO, portable, hand held immersion blender, variable speed, handle grip, with 26" stainless steel cutter tube, 1 HP, 650 watt, 115v/60/1. Stainless steel tubes (various lengths) and whisk available upon request as an accessory, to mix, liquidize, whip or emulsify.

IP55 water protected control panel.

With NEMA 5-15P Plug

With Constant Pressure Switch

Main Features

- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
- Delivered with:-flat base motor-stainless steel tube-space saving storing wall support
- Designed to be used directly in stew pots up to 63gal (240 lt).
- Safety feature requires both hands to start the mixer (no volt release system).
- Very easy to use, assemble and dismantle.
- Bayonet system to easily remove accessories without the use of tools.
- Red luminous indicator flashes when the device is overloaded.
- Its light weight ensures an optimum comfort for the user.
- Thanks to its electronic speed variator, a quick press with the thumb on the selector is all you need to change speeds.
- Productivity suitable for 50 to 300 meals per service.

Construction

- Smart speed control to ensure the right power according to the work load.
- Power: 650 watts.
- Maximum speed 10000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories

- 1 of Stainless Steel cutter tube 26in (553mm) PNC 650135


Optional Accessories

- Stainless Steel cutter tube 14in (353mm) PNC 650132 □
- Stainless Steel cutter tube 18in (453mm) PNC 650133 □
- Stainless Steel cutter tube 22in (553mm) PNC 650134 □
- Stainless Steel cutter tube 26in (553mm) PNC 650135 □
- Adjustable rail, for containers 15in - 26in PNC 653292 □
- Bowl cradle for containers PNC 653294 □
- Reinforced whisk 10in PNC 653578 □




APPROVAL: _____

Front

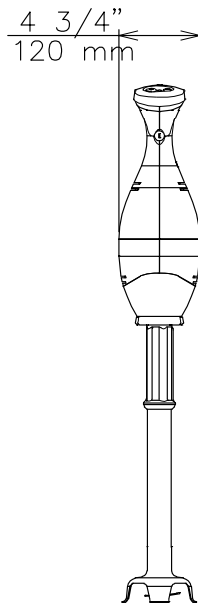


Side

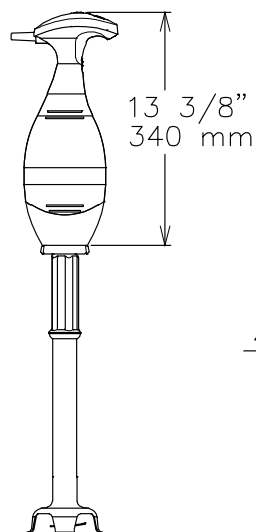

EI = Electrical connection

Top



Electric

Supply voltage:

600387 (BP6565U)

110-120 V/1 ph/50/60 Hz

Total Watts:

0.6 kW

Plug type:

USA NEMA 5-15P

Key Information:

External dimensions, Width: 5 7/16" (138 mm)

External dimensions, Depth: 4 3/4" (120 mm)

External dimensions, Height: 38" (965 mm)

Shipping width: 11 7/16" (290 mm)

Shipping depth: 27 3/16" (690 mm)

Shipping height: 7 1/16" (180 mm)

Shipping weight: 11 lbs (5 kg)